

FlexLoad™


Description : Multipurpose flexible load.



Technical data :

Standard products :

<u>Diameter</u>	<u>Name</u>	<u>Specific mass</u>
ø34 mm	(S)	4,0 kg/m
ø43 mm	(M)	6,2 kg/m
ø54 mm	(L)	10,0 kg/m

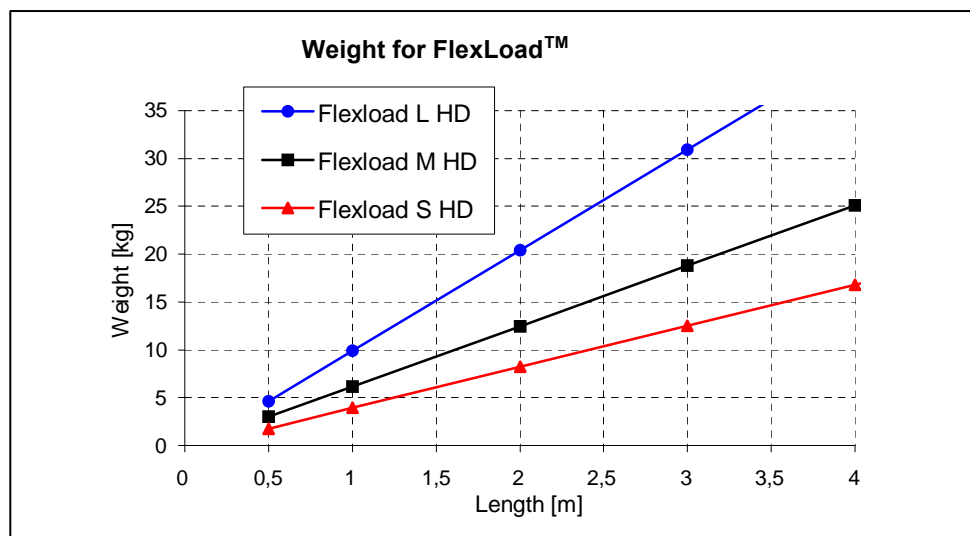

Stainless (AISI304) sealing plates and bolts, round edges and sealed and secured ends

Maximum temperature : 90 °C
Min. weight : 1,8 kg (standard range of products)
Max. weight : 25 kg (standard range of products)
Tolerance weight : +/- 4 %
Lengths : customers demand (standard range products 1,0...1,5....2,0....2,5....3,0 m)
Tolerance length : +/- 3%
Coefficient of friction : $\mu_s = 0,45$ (FlexLoad™ / melamin)