


FlexTool™

Description : Flexible silicone profile for consolidation of laminate on BeamLine™.

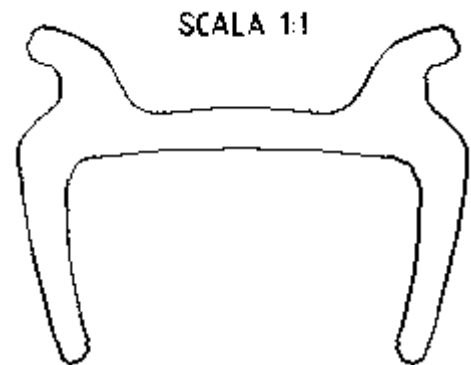

Technical data :

Maximum temperature :	150 °C
Weight :	860 g/m +/- 5 %
Lengths :	Customers demand (standard range max. 3000 mm)
Tolerance length :	+/- 2%
Colour :	Blue
Cutting :	By knife or scissor
Minimum inner radius :	500 mm (with BeamLine™ profile)
Minimum outer radius :	300 mm (with BeamLine™ profile)

Storage :

Temperature :	Room temperature
Placement :	Linear straight lengths on even surface Avoid storage in rooms without good ventilation (smell)

Usage : To increase lifetime, profiles should be treated with release wax, alternatively foil can be used between part and FlexTool™