


KorruLine™ 150xxx125


Corrugating modulus : 1,25 mm
 Height : 1,7 mm +/- 0,3 mm
 Wavelength : 4,0 mm +/- 0,15 mm
 Lengths : Customers demand
 (up to 3000 mm (+/- 2 %))
 Width : 150 mm +/- 1,5 mm
 Surface : non-treated

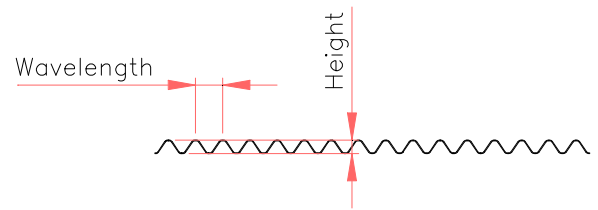

<u>Material :</u>	<u>Alloy</u>	<u>Thickness</u>
Aluminium	AW 1200	0,10 mm ... 0,15 mm
Aluminium	AW 1050 b	0,10 mm
Brass	MS 63 b	0,10 mm
Copper	Ecu b	0,15 mm

KorruLine™ 150xxx250


Corrugating modulus : 2,5 mm
 Height : 4,1 mm +/- 0,30 mm
 Wavelength : 8,1 mm +/- 0,15 mm
 Lengths : Customers demand
 (up to 3000 mm (+/- 2 %))
 Width : 150 mm +/- 1,5 mm
 Surface : non-treated

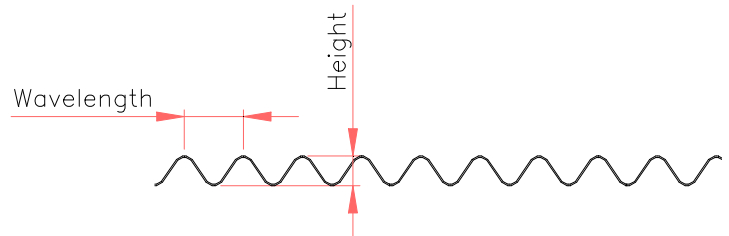

<u>Material :</u>	<u>Alloy</u>	<u>Thickness</u>
Aluminium	AW 1200	0,10 mm ... 0,15 mm
Aluminium	AW 1050 b	0,10 mm
Brass	MS 63 b	0,10 mm
Copper	Ecu b	0,15 mm

KorruLine™ 150xxx500

Corrugating modulus : 5,0 mm
 Height : 8,75 mm +/- 0,60 mm
 Wavelength : 17,0 mm +/- 0,5 mm
 Lengths : Customers demand
 (up to 3000 mm (+/- 3 %))
 Width : 150 mm +/- 1,5 mm
 Surface : non-treated

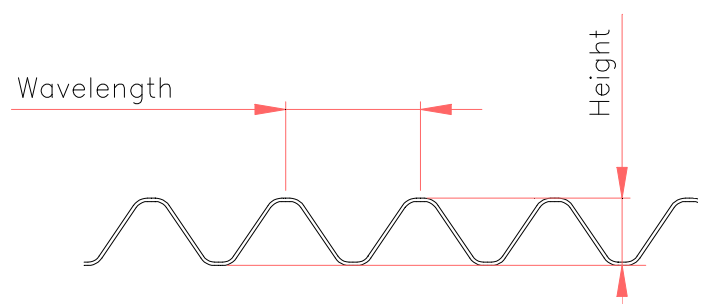

<u>Material :</u>	<u>Alloy</u>	<u>Thickness</u>
Aluminium	AW 1200	0,15 mm
Brass	MS 63 b	0,10 mm
Copper	Ecu b	0,15 mm