



PreBeam® 0,15 Alu / 1,2 Lam

Specific mass:	179 g/m (+/- 5 %)
Material:	AW 1200 Epoxy-laminate PU-adhesive
Length:	2950 mm (+/- 1 %)
Corrugating modulus:	2,5 mm
Aluminium thickness:	0,15 mm
Surface aluminium:	non-treated
Surface laminate:	brushed
Max. temp. (continuous):	70 °C
Min. temperature:	-10 °C
Dimensions:	28x56 mm
Characteristics:	Multipurpose profile for low-weight applications extra strength, water resistant
Cutting:	By saw

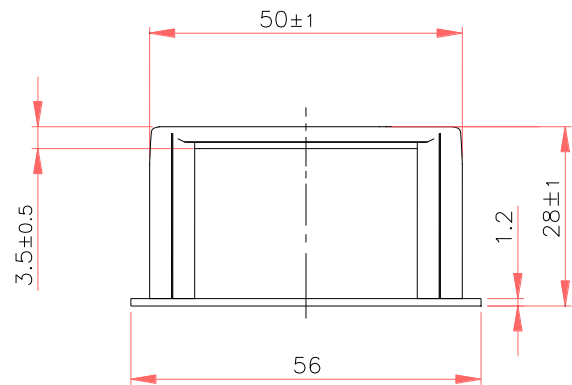


Radial shapes
Min. outer radie: 200mm
Min. inner radie: 100 mm

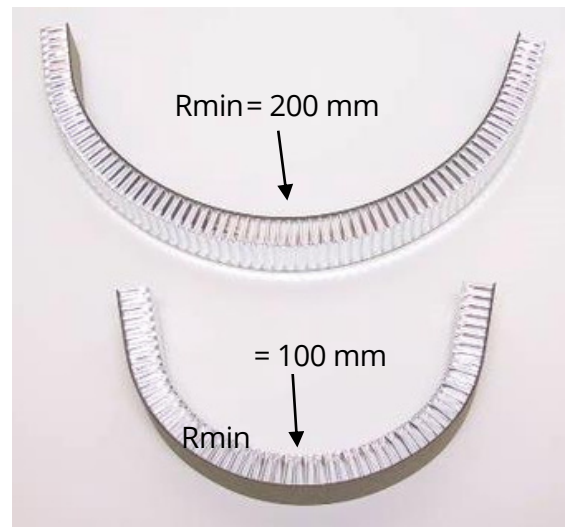

Storage

Temperature:	Room temperature
Placement:	Linear straight lengths on even surface RH 20% - 70 % Avoid direct sunlight.

3-point bending

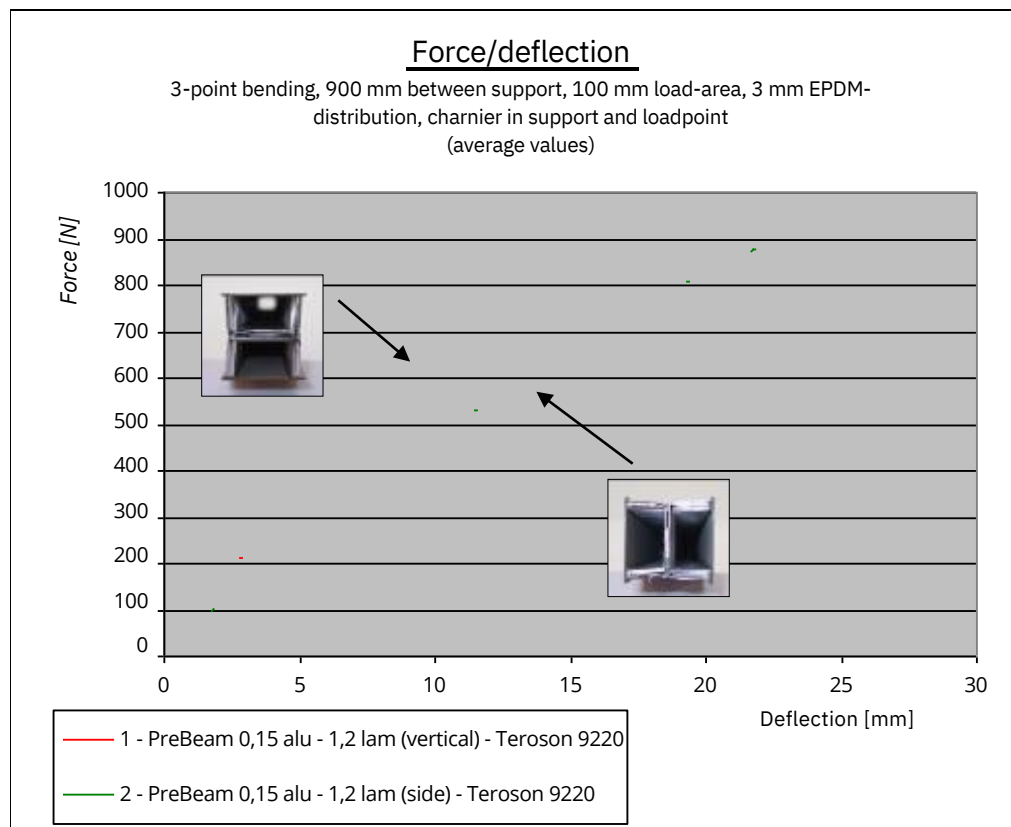

Conditions

Room: 17 degrees C, 52 % RH

Speed: 11 mm/min

The technical information and data provided above should be considered representative or typical only, and should not be used for specification purposes. Any further construction should be based on individual studies and testing with the materials involved.